



Technical Information


SECURITY FRICTION STAYS - DIMENSIONS

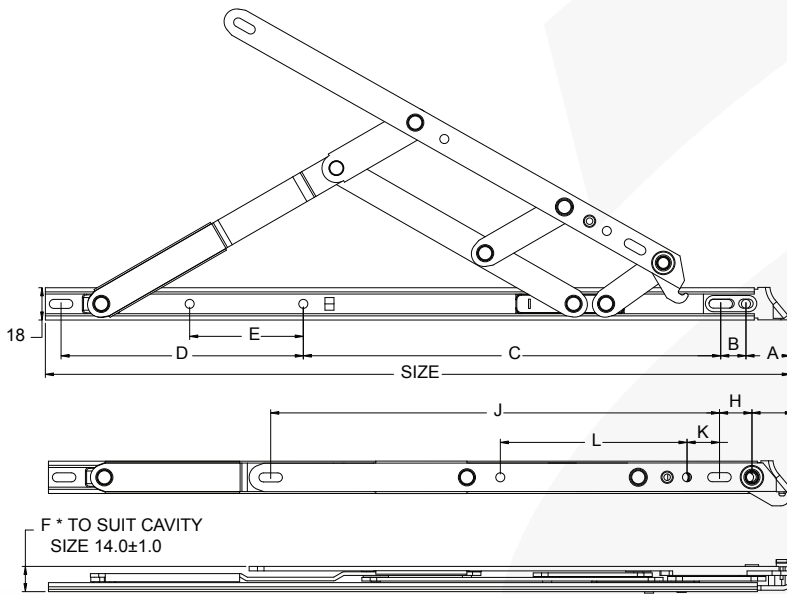

Security Friction Stay

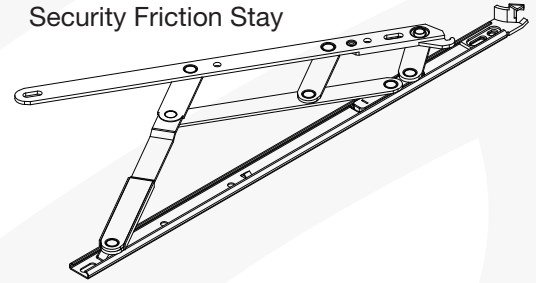

Security Restricted Friction Stay

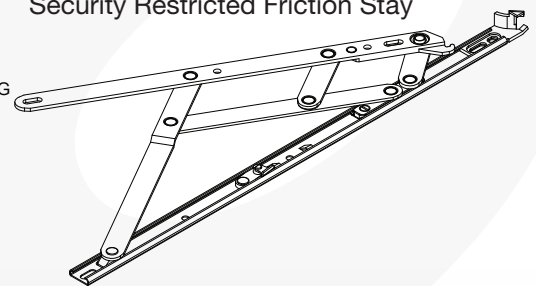

DIMENSIONS - MM

	SIZE	A	B	C	D	E	F	G	H	J	K	L
SIDE HUNG	12"	22.5	18.0	196.0	69.0	-	14.0	23.0	15.0	173.5	-	74.5
	16"	22.5	18.0	246.0	119.0	49.0	14.0	23.0	18.5	220.0	13.5	107.0
TOP HUNG	8"	22.5	18.0	125.5	40.5	-	14.0	23.0	15.0	136.0	-	-
	10"	22.5	18.0	174.5	41.5	-	14.0	23.0	18.5	155.0	13.5	-
	12"	22.5	18.0	209.5	56.0	-	14.0	23.0	18.5	176.0	13.5	37.0
	16"	22.5	18.0	246.0	119.0	49.0	14.0	23.0	18.5	220.0	13.5	107.0
	20"	22.5	18.0	213.5	251.0	116.0	14.0	23.0	18.5	270.5	13.5	157.5
	24"	22.5	18.0	213.5	350.5	166.0	14.0	23.0	18.5	307.0	13.5	207.5

- A range of security top hung and side hung variants that can conform to BS7950:1997
- Advanced interlocking hook design creating two additional high level security points on a window sash
- Side hung - 12" and 16", Top hung - 8" - 24"
- Spring loaded restrictor option available which ensures automatic re-engagement as the stay is closed (limiting the initial opening to 100mm)
- Top hung restricted stays supplied with catches on both left and right hand stays
- Side hung restricted stays supplied handed with catches fitted on lower stay only

Technical Information

Assessment Data

Performance: stays are tested to over 25,000 operations

Corrosion resistance: meets requirements of BS EN 1670:1998 grade 5

Restricted variant meets requirements of BS6375 Pt.2 (BS EN 1204 - 1:2003)

Material Specifications

Track, link and rivets: 430 grade stainless steel (ref BS1449 Part 2:1991)

Plastic Components: Nylon 6

Additional Information

Box Qty: 10 Pairs, **Accessories:** Jig, 4mm Packers (HSFP)

PRODUCT CODES						
	TYPE	CODE	SIZE (")	OPENING ANGLE (°)	MAX WEIGHT (KG)	MAX VENT SIZE (MM) W X H
SIDE HUNG	SECURITY STAY	SSH	12	60	22	600 x 1200
		SSH	16	60	24	650 x 1200
TOP HUNG		STH	08	80	12	1200 x 350
		STH	10	85	14	1200 x 400
		STH	12	85	16	1200 x 600
		STH	16	60	20	1200 x 800
		STH	20	45	24	1200 x 900
		STH	24	40	27	1200 x 1000
SIDE HUNG	SECURITY RESTRICTED STAY	L/RSRSH	12	60	22	600 x 1200
		L/RSRSH	16	60	24	650 x 1200
TOP HUNG		SRTH	16	60	20	1200 x 800
		SRTH	20	45	24	1200 x 900
		SRTH	24	40	27	1200 x 1000



PICTURE SHOWS RESTRICTED VERSION

